



STATIC TEST REPORT No. 1000

Element	Storch HS Jabiru engine mount
Purpose	Limit load structure resistance
Method	Static load
Instruments	meter
According to	LTF UL section S 361

Supervisor	Mr. Aldo Cattano
Executor	M. Stafuzza, G. Stafuzza, D. delle Vedove, S. Franceschini
Witness	Mr. Brian Franken
Date:	15/12/2003

CONDITION A:

According to LTF-UL 361 we compute the loads acting on engine mount. From Jabiru 2200 "Technical Data" we have the followings:

- Max. Power: 80 hp (at 3300 RPM)
- Direct shaft no reduction
- Weight: 66 Kg (Engine+ accessories+ propeller+ engine mount)

According to LTF-UL361 (a) we have:


$T_{Tor-max} = (\text{Max. available Power} / \omega)$ being:
 Max. available Power = (80 hp) * (prop) = (80) * (.9) = 72 hp = 52.92 KW
 $\omega = 3300 \text{ RPM} = 345.57 \text{ rad/sec}$

Then the max. torque is:

$T_{Tor-max} = (52920 / 345.57) = 153.14 \text{ Nm}$ (torque is applied 1 mt side of c.g.)

From Jabiru engine 2200 instruction manual, torque diagram, we obtain higher value of $T_{Tor-max} = 173 \text{ Nm}$ (torque is applied 1 mt side of c.g.)

See diagram included:

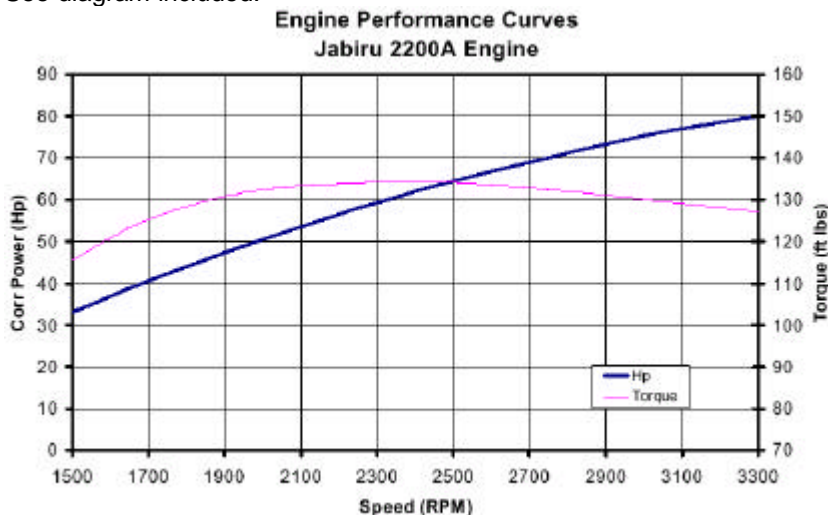

The vertical (downward) limit load from flight condition ($n_1 = 4$) (safety factor = 1.5) , is:

$P_w = (.75)W(n_1) * (S.F.) = (.75)(66)(4) (1.5) = 297 \text{ Kg}$
--

CONDITION B:

According to LTF-UL 361(b) we have:

Assuming that the max continuous power is max power (80 hp), from the Jabiru engine “Technical Data” we found corresponding speed of 3300 RPM.

Then the limit engine torque is:

$$T_{Tor} = (Max\ available\ power / \omega) \cdot f$$

Being:

$$Max\ available\ power = (80\ hp) \cdot (\eta\ prop) = (80) \cdot (0.9) = 72\ hp = 52.92\ kw$$

$$\omega = 3300\ RPM = 345.57\ rad/sec$$

f= factor from table of LTF UL 361 f = 2 (four stroke, four cylinder)

we have:

$$T_{TOR} = (52920 / 345.57) \cdot (2) = 306.27\ Nm$$

From Jabiru engine 2200 instruction manual, torque diagram, we obtain higher value of $T_{Tor-max} = 173\ Nm$ (torque is applied 1 mt side of c.g.)

The vertical (downward) limit load from flight condition ($n_1 = 4$) (safety factor = 1.5) is:

$$P_w = W(n_1) \cdot (S.F.) = (66)(4)(1.5) = 396\ Kg\ (LIMIT)$$



Note: The engine torque values considered here, are on conservative side for at least the two following topics:

1. The real propeller efficiency value is surely lower than 0.9
2. The engine power curves used refer to tests bench with throttle valves completely open.

TEST PROCEDURE

The test was done putting 13 sand bags of 30 kg each over the engine mount for the vertical load and 2 sand bags of 27 and 27 kg each at 1 meter aside from the C.G. position using a bar.

To be sure of the test, we followed a linear increase of load, shown in the following table:

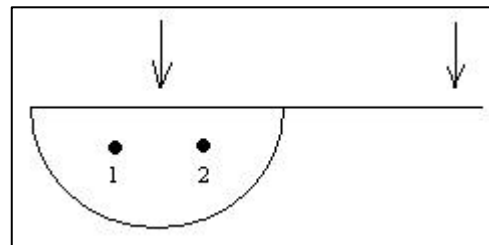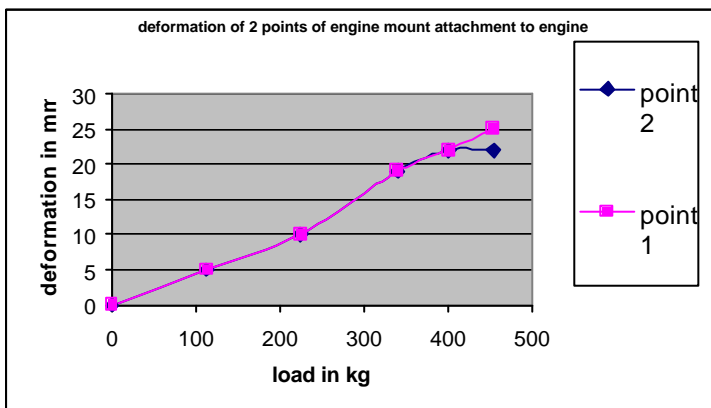

See attached photos:



Fig.1



Fig.2

Conclusions

In this test the safety margins of all items have a positive value, so the structure is strong enough to bear critical flight condition for the ultra light category.

Signature of responsible person:

:

Mr. Aldo Cattano

A handwritten signature in black ink, appearing to read 'Aldo Cattano', with a stylized flourish extending to the right.